

R200IR1200-G4.1

Low intensity + infrared obstacle light for nighttime marking




Obstacle Light R200IR1200-G4.1

For nighttime marking according to:

- ICAO Low Intensity Obstacle Light Type B
- 25 cd Low Intensity Red Obstacle Light (MOD)
- 200 cd Low Intensity Red Obstacle Light (MOD)
- "Mittelleistungsfeuer" according to BAZL
- W,rot ES according to AVV
- IR Medium Intensity Obstacle Light according to TRAFI
- IR Obstruction Light according to MOD
- 1200 mW/sr IR Obstruction Light (Austria)

The Lanthan obstacle light is characterized by its compact design and robust construction. Its key features include:

- Internal ambient light sensor (VEML7700)
- Build-in GPS
- Capable of firmware updates (FOTA)
- Field-configurable settings

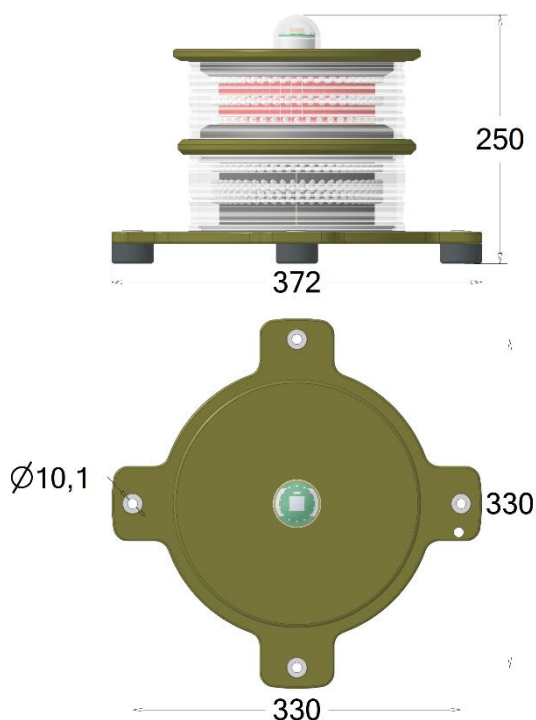

Being the first LED fire supplier in the wind industry, Lanthan provides reliable obstacle lights.

Manufactured by TWE GmbH Trade Wind Energy (part of Lanthan Group).

Article Allocation

Name / Description	Article-No.
R200IR1200-G4.1	LAN-000809

R200IR1200-G4.1

Low intensity + infrared obstacle light for nighttime marking




Technical Data

Nominal Voltage	24 V / 48 V DC
Functional Voltage	19,2 V – 55 V
Ambient temperature	-40° to +55 °C
Power consumption	Peak (200 cd + 600 mW/sr): 35 W Average (200 cd + 600 mW/sr): 9 W Peak (W,rot ES + 1200 mW/sr): 40 W Average (W,rot ES + 1200 mW/sr): 26 W
Max on current	2,2 A
Service lifetime	Min. 10 years
Optical characteristics red	• 25 cd Low Intensity Red Obstacle Light (MOD) • 32 cd Low Intensity Red Obstacle Light B (ICAO) • 100 cd Mittelleistungsfeuer (BAZL) • 100 cd W,rot ES (AVV) • 200 cd Low Intensity Red Obstacle Light (MOD)
Optical characteristics infrared	• 500 mW/sr IR-Mittelleistung (BAZL) • 500 mW/sr IR-Medium Intensity Obstacle Light (TRAFI) • 600 mW/sr IR Obstruction Light (MOD) • 1200 mW/sr IR Obstruction Light (Austria)
Colour coordinates/wavelength	according to ICAO; peak wavelength infrared: 850 nm
Timing	GPS based
Enclosure	Marine grade aluminum (AlMg3) EN AW-5754, anodized to 25 µm
Lens	Clear acrylic, UV-resistant
Bare weight	12 kg
Pressure compensation	Gore membrane vents
Size	height = 250 mm; diameter = 372 mm
Sealing	EPDM o-rings
IP-class	IP68

Pin Out

1	Power Supply +24V
2	Power Supply 0 V
3	FE
4	Modbus D1
5	Modbus D0
6	Not connected



Connector G4.1 Variant

Han 3A:

Housing	09 37 003 0301
Pin Insert	09 12 005 3001
Pins	09 33 000 6102

Recommended Cable Connector:

Housing	1x 19 37 003 1640
Pin Insert	1x 09 12 005 3101
Pins	5x 09 33 000 6202

Additional Information:

- System Integration Manual

R200IR1200-G4.1

Low intensity + infrared obstacle light for nighttime marking

